



Heat protection
Reduces radiant heat



Protection against shards of glass
In case of breakage, the glass is held together



Light protection
Glare is reduced



Privacy protection
Grants daytime privacy



EN 12600 certified
International breakage certification



Scratch-free
Industrial-grade scratch resistant coating



35 years of experience
One of the longest-operating distributors in the industry




Smoke-like appearance
The building gets more beautiful



UV protection
Protects your health and your valuables

Energy saving on various window systems

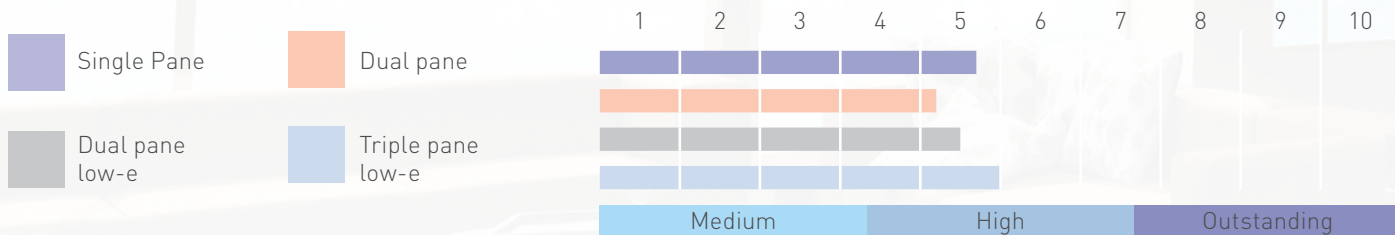

Save energy with window films!

Tensile strength 28500 PSI 197 N/mm ²	Break strength 145 lbs/inch 25 N/mm	Puncture strength 103 lbs 458 N
--	---	---------------------------------------

	Single Pane	Dual pane	Dual pane low-e	Triple pane low-e
Total Solar Energy Rejected	47%	42%	45%	50%
Visible Light Transmitted	52%	48%	45%	41%
Visible Light Reflected Exterior	17%	23%	20%	25%
Visible Light Reflected Interior	16%	19%	17%	19%
Total Solar Energy Reflected	19%	22%	34%	33%
Total Solar Energy Absorbed	40%	43%	36%	41%
Total Solar Energy Transmitted	42%	35%	30%	26%
SHGC	0.53	0.58	0.55	0,50
UV Rejection	99%	99%	99%	99%
U-Value	6.08	2.78	1.44	1.21
Emissivity	0.9	0.9	0.9	0.9
Compatibility	Compatible	Compatible	Conditionally compatible	Not compatible



Interior/exterior
Interior



Thickness
150 microns (6 mil)



Adhesive
Double adhesive thickness



Scratch Resistant Coating
2nd generation



Sizes available
1.52×30 m (60"×100')



Warranty
10 years



Layers
Multi



Certification
EN12600