



Energy saving

Save money on cooling bills



EN 12600 certified

International breakage certification



35 years of experience

One of the longest-operating distributors in the industry



Protection against shards of glass

In case of breakage, the glass is held together



Privacy protection

Gives daytime privacy



Modern appearance

The building gets more beautiful



Light protection

Glare is reduced



Scratch-free

Industrial Scratch Resistant Coating



UV protection

Protects your health and your valuables

Energy saving on various window systems



Single pane




Dual pane



Dual pane low-e



Triple pane low-e

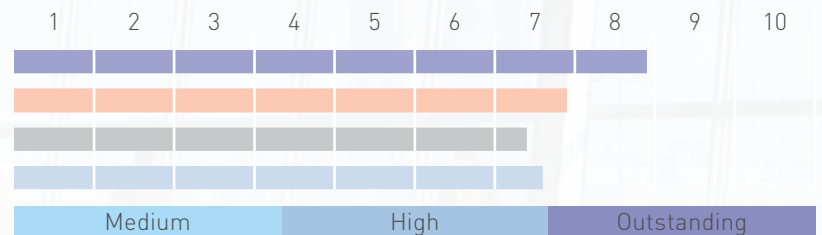

Save energy with window films!

Tensile strength
33600 psi
232 N/mm²

Break strength
134 lbs/inch
23 N/mm

Puncture strength
103 lbs
458 N

	Single pane	Dual pane	Dual pane low-e	Triple pane low-e
Total Solar Energy Rejected	79%	69%	64%	66%
Visible Light Transmitted	15%	17%	17%	16%
Visible Light Reflected Exterior	60%	59%	59%	58%
Visible Light Reflected Interior	59%	59%	59%	59%
Total Solar Energy Reflected	55%	52%	52%	47%
Total Solar Energy Absorbed	33%	36%	36%	43%
Total Solar Energy Transmitted	12%	12%	12%	11%
SHGC	0,21	0,31	0,36	0,34
UV Rejection	99%	99%	99%	99%
U-Value	5,34	2,62	1,43	1,15
Emissivity	0,84	0,84	0,84	0,84

Compatibility

Compatible

Compatible

Compatible

Conditionally Compatible



Interior/exterior

Interior



Thickness

125 microns



Adhesive

Double security adhesive



Scratch Resistant Coating

2nd generation



Sizes available

1,52x30 m



Warranty

10 years



Certification

EN12600 2B2



Layers

Multi