

Skyfol XT15 SLPC

Window film



Energy saving

Dramatic savings on cooling bills



Developed for skylights

Especially for sloped polycarbonate with outstanding efficiency



Light protection

Glare is reduced



Long durability

6-year warranty on polycarbonate



Uniform temperature

Hot and cool spots are levelled off



For polycarbonate

Air permeable and removable



35 years of experience

One of the longest-operating distributors in the industry



Modern appearance

The building gets more beautiful



UV protection

Protects your health and your valuables


Energy saving on various window systems



Single Pane



Dual pane

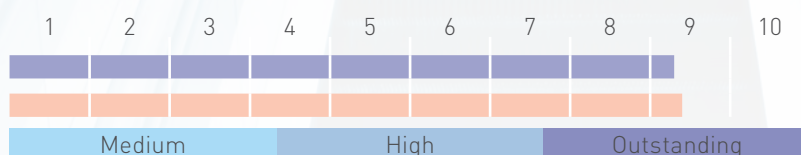

Save energy with window films!

	Single PC	Dual PC
Total Solar Energy Rejected	83%	84%
Visible Light Transmitted	14%	16%
Visible Light Reflected Exterior	66%	62%
Visible Light Reflected Interior	65%	62%
Total Solar Energy Reflected	66%	63%
Total Solar Energy Absorbed	24%	25%
Total Solar Energy Transmitted	10%	12%
SHGC	0,17	0,16
UV Rejection	99%	99%
U-Value	2,71	2,71
Emissivity	0,84	0,84
Compatibility	Compatible	Compatible



Interior/exterior

Exterior



Thickness

50 microns (2 mil)



Adhesive

Pressure sensitive



Scratch Resistant Coating

Without coating



Sizes available

1,52×30 m (60"×100'),



Warranty

6-year warranty on sloped windows